



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C07C 29/149, C07D 307/08, 307/32	A2	(11) International Publication Number: WO 99/35113 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/EP99/00014 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 9800012 8 January 1998 (08.01.98) BE (71) Applicant (for all designated States except US): EURODIOL S.A. [BE/BE]; Parc Industriel Zone A, B-7181 Feluy (BE). (72) Inventor; and (75) Inventor/Applicant (for US only): BERTOLA, Aldo [IT/IT]; Via Luigi Illica, 5, I-20121 Milano (IT). (74) Agent: SARPI, Maurizio; Studio Ferrario, Via Collina, 36, I-00187 Roma (IT).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: A PROCESS FOR THE PRODUCTION OF TETRAHYDROFURAN, GAMMABUTYROLACTONE AND BUTANEDIOL		
(57) Abstract Process for the production of tetrahydrofuran, gammabutyrolactone and butanediol starting from maleic anhydride esters, consisting of two subsequent hydrogenations.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A process for the production of Tetrahydrofuran, Gammabutyrolactone and Butanediol.

Description

The present invention relates to a process for the production of tetrahydrofuran, gammabutyrolactone and butanediol starting from maleic anhydride esters, consisting of two subsequent
5 hydrogenations.

It is known that tetrahydrofuran (THF), gammabutyrolactone (GBL) and butanediol (BDO) can be produced thanks to several methodologies. THF and GBL are chiefly produced starting from BDO. THF is
10 produced starting from butanediol (BDO) by a dehydrogenation process.

THF and GBL production from BDO results to be expensive, because of the relatively high costs arising from the BDO production processes, inherently rather
15 complex.

According to a technique employed in industry, BDO is produced by reaction of acetylene with formaldehyde, with ensuing formation of butynediol, which itself undergoes hydrogenation to BDO.

20 Mitsubishi Chemical Industries developed a process apt at producing BDO with Butadiene as starting material.

The process involves butadiene acetoxylation to 1,4-diacetoxy-2-butene, that is then hydrogenated
25 and hydrolised to BDO.

General Electric Corp. patented a process for the production of BDO starting from propylene.

The process includes the conversion of propylene to allyle acetate, which is converted into 4-acetoxybutanol. This eventually hydrolyses to afford BDO.

5 A special attention has been devoted to the development of processes where butane is employed as starting material, via the formation of a maleic anhydride intermediate.

Several processes have been proposed for the production of THF, GBL and BDO starting from maleic anhydride, esters thereof, or homologous compounds such as succinic acid and/or fumaric acid esters.

In US patents N°'s 4,584,419 and 4,751,334 in the name of Davy McKee Ltd., processes are described for the production of BDO by hydrogenation of carboxylic acid esters containing 4 Carbon atoms, typically ethyl maleate.

In the above patents, claims refer to hydrogenations carried out within a field with pressures ranging between 25 and 75 bars, and temperatures between 150 and 240°C, in the presence of a stabilised copper chromite type catalyst.

Aim of the present invention is to provide a process whereby THF and GBL can be produced in variable proportions by hydrogenation at moderate pressures with maleic anhydride esters as starting materials, without going through BDO production.

BDO can be produced starting from GBL by subsequent hydrogenation carried out at a higher pressure.

30

It is another aim of the present invention that of proposing a more straightforward process with higher final product yields, without the need to resort to the extreme pressure and temperature conditions
5 which are proper of the processes proposed in the prior art.

According to the invention the above aims are accomplished thanks to a process for the production of tetrahydrofuran, gamma butyrolactone and butanediol
10 with maleic anhydride esters as starting materials, by two successive hydrogenations.

More particularly the process comprises:

a) A primary hydrogenation of maleic anhydride ester in the vapour phase, at a moderate
15 pressure, in a reactor comprising three reaction stages connected in series.

In the first of the stages thereof a heterogeneous selective hydrogenation catalyst is employed to carry out a conversion of maleic anhydride
20 ester into succinic anhydride ester.

In the second stage a selective hydrogenation catalyst is employed to carry out a conversion of succinic anhydride ester mainly into GBL.

In the third stage a dehydration catalyst is
25 employed mainly to produce THF.

b) Separation of the effluent from the primary hydrogenation from THF and GBL products.

c) Feeding a fraction of the GBL produced to a secondary hydrogenation in the vapour phase and at a
30 higher pressure, on a hydrogenation catalyst where GBL

is mainly converted to BDO.

These and other features will be more readily apparent from the following description of a preferred not limiting embodiment of the invention with reference
5 to the accompanying drawings in which:

Fig. 1 shows the typical scheme for the primary hydrogenation.

Fig. 2 shows a typical scheme for the secondary hydrogenation.

10 In the process object of the present invention, maleic anhydride ester, preferably dimethymaleate (DMM) is completely vapourised in a hydrogen rich stream, to be fed to a reaction system containing three distinct catalysts connected in
15 series. The reaction system thereabout is hereafter indicated as primary hydrogenation.

The first stage of the primary hydrogenation employs a noble metal based heterogeneous selective hydrogenation catalyst.

20 In the second stage of the primary hydrogenation a heterogeneous copper-zinc oxide or copper chromite type catalyst is employed.

In the third stage of the primary hydrogenation, a silica-alumina type heterogeneous
25 catalyst is employed. This is acidic and rich in silica.

To allow the reaction to occur in the vapour phase, it is necessary that the reaction mixture be rich in hydrogen.

30 The H_2 to ester molar ratio in the three

stages of the primary hydrogenation reactor ranges between 50 and 600, preferably between 70 and 200.

Pressure and temperature in the primary hydrogenation, as well as residence times on the catalysts can be optimised depending on the proportions between the GBL and THF to be produced.

The above ratio can be varied within a large interval, which spans between the 90:10 and the 10:90 GBL:THF ratios.

Optimal overall yields are obtained operating the reaction with the ratios of the above ranging between 70:30 and 40:60.

The overall average operating pressure ranges between 3 and 40 bars, and preferably between 15 and 25 bars.

Temperature at the inlet of the first reaction stage is between 120 and 170 °C, preferably between 190° and 220°C.

Liquid Hourly Space Velocity in the first stage ranges between 1.0 and 3.0 hr⁻¹.

Liquid Hourly Space Velocity in the second and third stages range beytween 1.0 and 0.5 hr⁻¹

The space velocity with which the gaseous mixture flows on the catalyst of the third reaction stage results to be 1.5 to 10 times higher than that it has when it flows on the catalyst of the second stage.

A cooling between the several reaction stages can be carried out by admixing a cold hydrogen stream to the effluent from the previous stage of reaction.

The typical scheme of the primary

hydrogenation process is given in figure 1. Operating conditions refer to dimethylmaleate (DMM) as starting material.

Essentially, the process holds even in case
5 the starting material is made up of other maleic anhydride esters.

The ester feedstock (line 1) is fed to vapouriser 3 together with a recycle stream (line 2) containing BDO and unconverted dimethylsuccinate (DMS),
10 from product fractionation unit 25.

In the recycle stream GBL is also typically present, and this forms an azeotrope with DMS.

In vapouriser 3 the feedstock (line 1) and the recycle (line 2) come to contact with a hot
15 hydrogen stream (line 4) and they vapourise.

In the gas stream at the outlet of the vapouriser (line 5), the H_2 to shot molar ratio is 100, temperature is 140°C, pressure is 15 ATE.

Such stream feeds the first stage of
20 hydrogenation 6 that contains a heterogeneous selective hydrogenation catalyst which is typically, and not limitedly, of the palladium on alumina type.

In the first reaction stage DMM is fully hydrogenated to DMS.

25 The effluent feeds into the second stage of reaction 7 where a copper-zinc oxide or stabilised copper chromite type catalyst is contained.

At the outlet of the second reaction stage, temperature is taken down from approximately 225 to
30 approximately 200 °C by injection of a cold hydrogen

stream (line 20).

In the third stage of reaction 8, gases flow onto an acidic catalyst of the silica-alumina type. Mordenites or acidic zeolites are one type of catalyst
5 employed in the process. These have an 0.65 ABD apparent density and a $450 \text{ m}^2\text{gr}^{-1}$ surface area.

At the outlet of the third reaction stage, the overall conversion is as high as 97% and product distribution is the following:

10	GBL:	53%
	THF:	34%
	BDO:	7%
	Byproducts:	3%

Overall Liquid Hourly Space Velocity in the
15 first reaction stage is 2.5 hr^{-1} . Overall Liquid Hourly Space Velocity in the second and third reaction stages is 0.2 hr^{-1} .

The effluent from the third reaction stage (line 9) cools down in exchanger 10 letting off heat to
20 the recycle hydrogen stream. It also does so in exchanger 11 and eventually feeds separator 12 where the condensed organic phase and the hydrogen enriched gaseous phase separate.

After leaving separator 12, the gaseous phase
25 (line 13) is compressed in compressor 14, and is then recycled to the reaction system. A fraction of recycle gas is purged (line 15) to avoid excessive deposition of inert materials.

Compressed gas feeds (line 16) column 17,
30 where it comes to contact with a GBL enriched stream

(line 18) from product fractionation unit 25, which washes it. This allows removal of the steam present in the gases.

As known, water is a common byproduct in THF
5 synthesis.

Such an effective removal of water as that achieved washing recycle gases with a GBL enriched liquid stream is important to avoid deterioration of the copper based catalyst.

10 After washing, the GBL enriched stream (line 30) returns to the byproduct fractionation unit 25 where the absorbed water is removed.

Dried gases (line 19) together with the hydrogen feedstock, partly mix with the effluents from
15 reactors 6 and 7 for temperature check, and partly (line 22) preheat in exchanger 10 and subsequently in exchanger 23, where THF (line 26), water, methanol light organic byproducts (line 27), GBL (line 28), a fraction containing BDO and DMS which is eventually
20 recycled into the reaction (line 2) and heavy organic byproducts (line 29) separate.

A fraction of the GBL produced (line 31) is fed to the subsequent hydrogenation unit hereafter known as secondary hydrogenation, which operates at
25 high pressure.

The following are the typical operating conditions of the secondary reaction at the reactor inlet in the process object of the present invention:

Reaction Type:	adiabatic
30 Hydrogen:ester molar ratio	from 100 to

800, preferably
from 200 to
800.

Operating Pressure : from 75 to 120
5 bars, preferably
from 80 to 100
bars

Operating emperature: from 160° to
230°C,
10 preferably from
190° to 210°C

Catalyst Type: Copper-Zinc
oxid or copper
chromite.

15 Liquid Hourly Space Velocity: from 0.1 to 1.0
hr⁻¹, averagely
from 0.3 to 0.5
hr⁻¹.

A scheme of the secondary hydrogenation is
20 given in Figure 2.

GBL feedstock (line 31), together with a
liquid recycle stream (line 32) containing GBL from
fractionation unit 49, is fed to vapouriser 33.
Therein the shot (line 31) and the recycle (line 32)
25 come to contact with a hot hydrogen stream (line 34)
and vapourise.

At the vapouriser outlet, temperature is
190°C, pressure is 80 ATE and the gas stream (line 35)
has a hydrogen to ester ratio equalling 300:1.

30 Such gas straem feeds reactor 36 where a

catalyat of the copper-zinc oxide type or stabilised copper chromite type catalyst is contained. The latter has a surface area which is never any lower than $40\text{m}^2\text{g}^{-1}$.

5 Liquid Hourly Space Velocity is 0.35 hr^{-1} .
At the reactor outlet, more than 90% of the GBL feedstock has been converted.

Tetrahydrofuran is obtained as a byproduct and it totals up to 6% of the overall GBL produced, on
10 a molar basis.

The reaction shows a ca. 99% selectivity with respect to the total BDO plus THF produced.

The effluent from the reactor (line 37) cools down in exchanger 38, where it gives off heat to the
15 hydrogen enriched stream. After that it cools down in exchanger 39, before feeding into separator 41 (line 40), where the condensed organic phase separates from the hydrogen enriched gaseous phase.

After leaving separator 41 (line 43), the
20 gaseous phase is compressed in compressor 44, before being recycled to the reaction system.

A small fraction of the recycle gas is purged (line 45) to avoid excessive accumulation of inert material.

25 Compressed gas (line 46) admixes to the feed hydrogen (line 47) and preheats in exchanger 38 as well as in terminal heater 48. After that it feeds (line 34) vapouriser 33.

After leaving separator 41, the liquid phase
30 feeds (line 42) product fractionation unit 49 where two

products are separated: one consisting of THF, water and light organic byproducts, which is directed (line 50) towards the THF recovery unit. The other is an unconverted GBL enriched fraction (line 32) and it is
5 recycled to hydrogenation. Heavy organic byproducts (line 51) and BDO (line 52) separate at the same time.

The entire process thereof allows production of THF, GBL and BDO directly and with a high degree of flexibility, avoiding all the complications presented
10 by all those processes where THF and GBL are produced using BDO as starting material.

CLAIMS

1. A process for the production of tetrahydrofuran, gamma butyrolactone and butanediol with maleic anhydride esters as starting materials, characterised in that it comprises a sequence of the following three steps: a step wherein a primary hydrogenation of maleic anhydride ester is carried out; a step wherein the effluent originated in the primary hydrogenation separates from the products, namely GBL and THF; a step wherein a fraction of the GBL produced is fed to a secondary hydrogenation reaction where GBL is mainly converted to BDO.

2. A process according to claim 1 wherein the primary hydrogenation step comprises three reaction stages, the first of said stages wherein maleic anhydride ester is converted into succinic anhydride ester, the second of said stages wherein succinic anhydride ester is mainly converted into GBL, and the third of said stages wherein mainly THF is produced.

3. A process according to claims 1 and 2, characterised in that the primary hydrogenation of maleic anhydride ester takes place in the vapour phase and at a moderate pressure.

4. A process according to claims 1,2 and 3 wherein the primary hydrogenation takes place in a reactor comprising three reactor stages connected in series.

5. A process according to claim 4 wherein the reaction of the first stage occurs on a heterogeneous selective hydrogenation catalyst, the reaction of the

second stage occurs on a selective hydrogenation catalyst, the reaction of the third stage occurs on a dehydration catalyst.

6. Process according to claim 1 wherein the
5 secondary hydrogenation is in the vapour phase and at a pressure which is higher than that of the first hydrogenation.

7. A process according to claims 1 and 6 wherein
the secondary hydrogenation takes place on a
10 copper/zinc oxide or copper chromite catalyst.

8. A process for the production of
tetrahydrofuran, gamma butyrolactone and butanediol
with maleic anhydride esters as starting materials,
characterised in that it comprises a sequence of the
15 following three steps:

a) A primary hydrogenation of maleic anhydride
ester in the vapour phase, at a moderate pressure, in a
reactor comprising three reaction stages connected in
series; the first of said stages being equipped with a
20 heterogeneous selective hydrogenation catalyst employed
to carry out a conversion of maleic anhydride ester
into succinic anhydride ester; in the second of said
stages a selective hydrogenation catalyst being
employed to carry out a conversion of succinic
25 anhydride ester mainly into GBL; in the third of said
stages a dehydration catalyst being employed mainly to
produce THF;

b) Separation of the effluent from the primary
hydrogenation from THF and GBL products;

30 c) Feeding a fraction of the GBL produced to a

secondary hydrogenation in the vapour phase and at a higher pressure, on a hydrogenation catalyst where GBL is mainly converted to BDO.

9. A process according to claims 1 and 2, or 8
5 characterised in that the alkyl component of the maleic anhydride ester consists of 1 to 4 carbon atoms.

10. A process according to claims 1,2,3,4 and 5,
or 8 characterised in that the primary hydrogenation is carried out at an operating pressure that ranges
10 between 3 and 40 bars, and at an operating temperature that ranges between 120 and 250 °C.

11. A process according to claims 1,2,3,4 and 5,
or 8, and 10, characterised in that all along the three stages of the primary hydrogenation, the molar ratio
15 between hydrogen and ester shot ranges between 50 and 600.

12. A process according to claim 11,
characterised in that the molar ratio between hydrogen and ester in all three stages of the primary
20 hydrogenation ranges between 70 and 200

13. A process according to claims 1,2,3,4 and 5,
or 8 wherein the catalyst at the first stage of the primary hydrogenation reactor is noble metal based,
such as Palladium on alumina substrate, the catalyst at
25 the second stage is a catalyst of the copper-zinc oxide or stabilised copper chromite type, the catalyst of the third stage is of the alumina-silica type, it is acidic and rich in silica.

14. A process according to claims 1 and 2 or 8
30 characterised in that the ratio between the GBL and THF

products can range between 10:90 and 90:10.

15. A process according to claim 14, characterised in that the ratio between the GBL and THF products can range between 70:30 and 40:60.

5 16. A process according to claims 8 or 10, characterised in that the primary hydrogenation is carried out at pressures ranging between 15 and 25 bars.

10 17. A process according to claims 2 and 5, or 8 characterised in that the Liquid Hourly Space Velocity in the first stage ranges between 1 and 3 hr⁻¹.

18. A process according to claims 2 and 5, or 8 characterised in that the Liquid Hourly Space Velocity in the second stage ranges between 0.1 and 0.5 hr⁻¹

15 19. A process according to claim 13, characterised in that the catalyst in the third stage has a specific surface ranging between 50 and 800 m²g⁻¹.

20 20. A process according to claims 13 and 19 characterised in that the catalyst in the third stage contains between 60 and 100% silica.

25

30

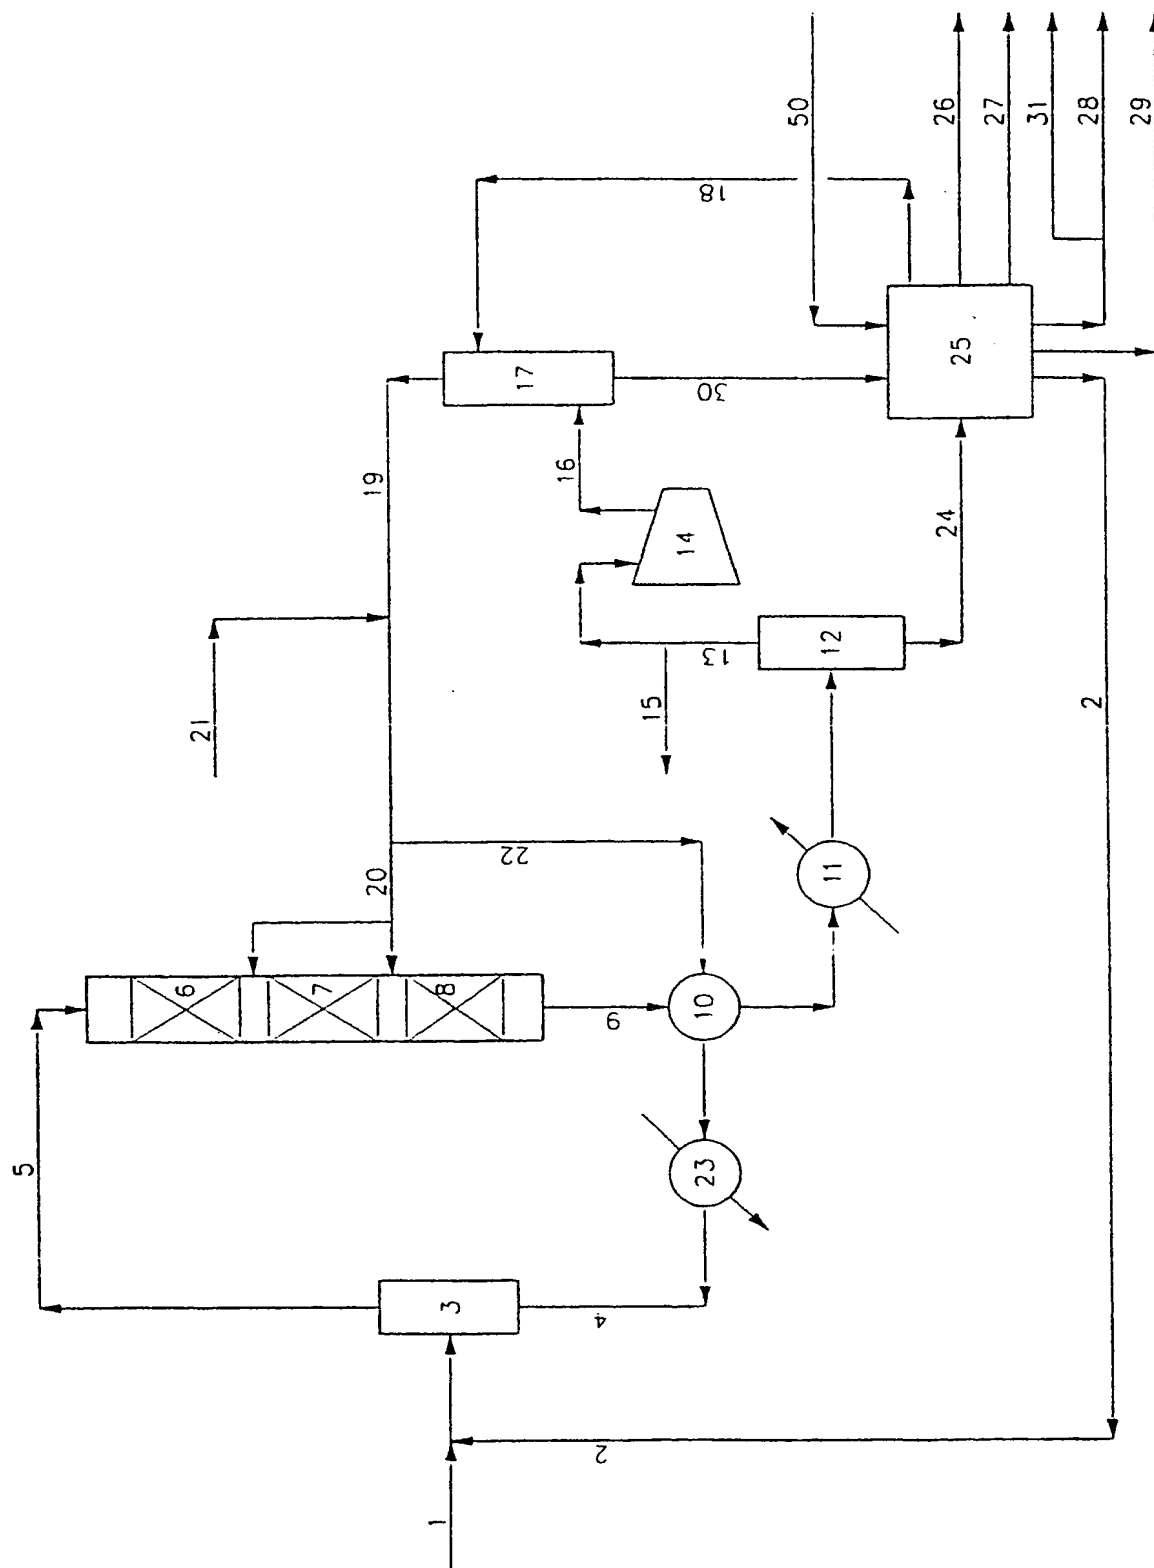


FIG. 1

2/2

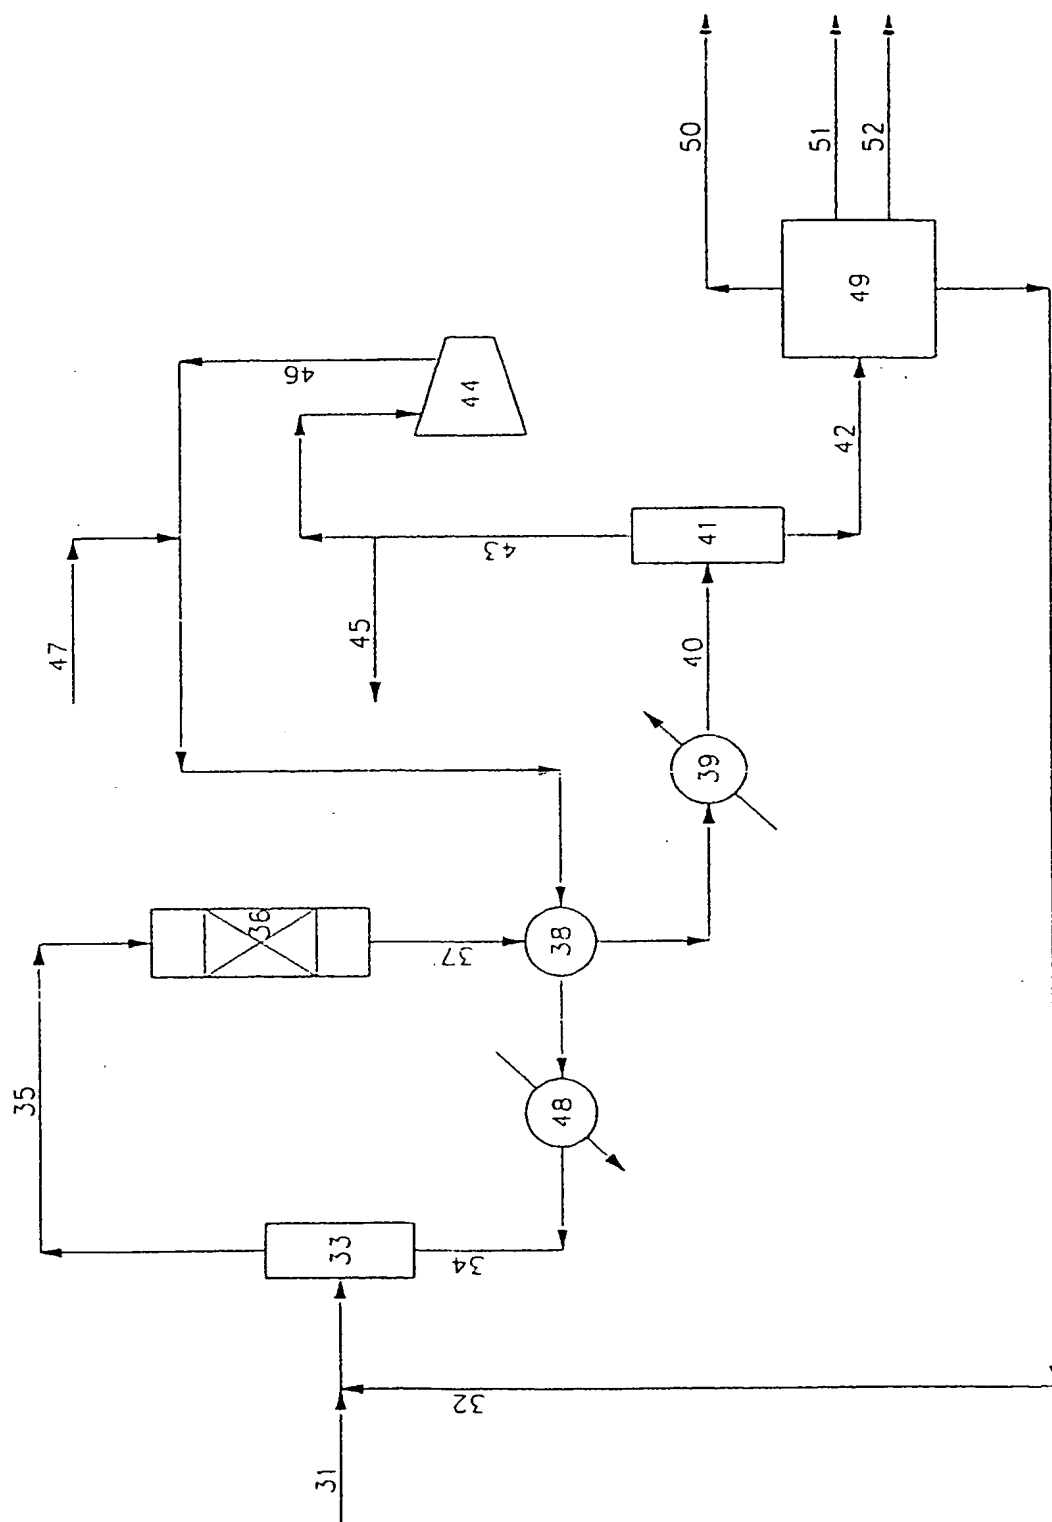


FIG. 2

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C07C 29/149, C07D 307/08, 307/32	A3	(11) International Publication Number: WO 99/35113 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/EP99/00014 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 9800012 8 January 1998 (08.01.98) BE (71) Applicant (for all designated States except US): EURODIOL S.A. [BE/BE]; Parc Industriel Zone A, B-7181 Feluy (BE). (72) Inventor; and (75) Inventor/Applicant (for US only): BERTOLA, Aldo [IT/IT]; Via Luigi Illica, 5, I-20121 Milano (IT). (74) Agent: SARPI, Maurizio; Studio Ferrario, Via Collina, 36, I-00187 Roma (IT).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> (88) Date of publication of the international search report: 16 September 1999 (16.09.99)
(54) Title: A PROCESS FOR THE PRODUCTION OF TETRAHYDROFURAN, GAMMABUTYROLACTONE AND BUTANEDIOL (57) Abstract Process for the production of tetrahydrofuran, gammabutyrolactone and butanediol starting from maleic anhydride esters, consisting of two subsequent hydrogenations.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/00014

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C07C29/149 C07D307/08 C07D307/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C07C C07D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 86 03189 A (DAVY MCKEE (LONDON)) 5 June 1986 see page 5 - page 6; claim 1 ---	1,8
A	US 4 032 458 A (S.D. COOLEY, ET AL.) 28 June 1977 see column 2; claim 1 ---	1,8
A	EP 0 190 424 A (CHEMIE LINZ) 13 August 1986 see example 1 ---	1
A	BE 892 958 A (DAVY MCKEE (OIL & CHEMICALS)) 16 August 1982 see page 6 ---	1,7

-/--



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 June 1999

Date of mailing of the international search report

01/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

English, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/00014

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 652 685 A (J.N. CAWSE, ET AL.) 24 March 1987 see column 2 - column 3; examples ---	1,7
A	US 2 251 895 A (W. REPPE, ET AL.) 5 August 1941 see the whole document -----	1

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/00014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8603189 A	05-06-1986	BR 8507068 A CA 1249837 A EP 0204730 A JP 6055684 B US 4751334 A JP 62501702 T	14-07-1987 07-02-1989 17-12-1986 27-07-1994 14-06-1988 09-07-1987
US 4032458 A	28-06-1977	NONE	
EP 0190424 A	13-08-1986	DE 3503485 A AT 57523 T CS 8600708 A JP 61180742 A	07-08-1986 15-11-1990 13-10-1989 13-08-1986
BE 892958 A	16-08-1982	AU 560590 B AU 8336582 A BR 8207962 A CA 1229096 A FI 831848 A WO 8203854 A GB 2116552 A,B JP 4057655 B JP 58500993 T NL 191438 B NL 8220121 T SE 452154 B SE 8303027 A ZA 8202718 A	09-04-1987 07-12-1982 04-10-1983 10-11-1987 24-05-1983 11-11-1982 28-09-1983 14-09-1992 23-06-1983 01-03-1995 01-07-1983 16-11-1987 30-05-1983 30-03-1983
US 4652685 A	24-03-1987	EP 0222398 A JP 62155231 A	20-05-1987 10-07-1987
US 2251895 A	05-08-1941	NONE	

THIS PAGE BLANK (USPTO)